


91 Only one satellite radio station is displayed and playing with activated Tuner

Release date: Mar 25,  
2009

Condition

REVISION HISTORY		
Revision	Date	Purpose
3	-	Revised Service (Added latest MMI Zug update)
2	11/10/2008	Revised Title to include Repair Group

Only one satellite station is available in the station list. Other stations can be selected consecutively with Scan in the Tuning submenu. However, only one station is always listed and audible.

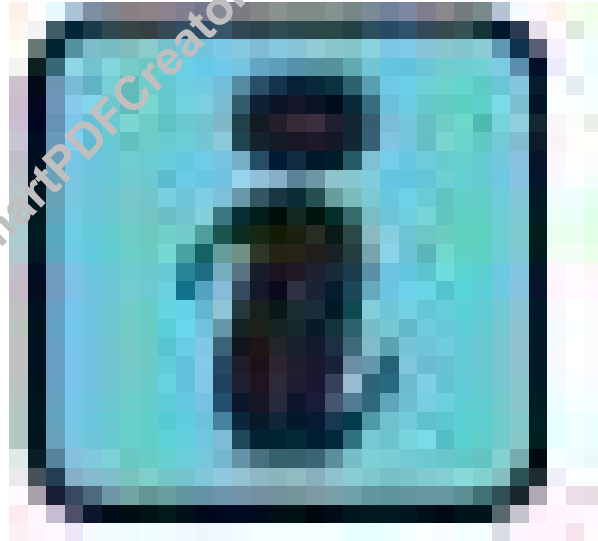

Technical Background

Due to a communication issue between the Sirius Satellite Tuner and Front Information Display Control Module J523, the complete station list is not transferred.

Production Solution

Software improvement.

Service

Do not replace the satellite tuner. A MMI system software update is required. Refer to Technical Service Bulletin 2019334 for directions to perform the update.



Tip: Due to the incompatibility of Navigation DVD Version 4 and lower with the new MMI software, it may be necessary to replace the installed DVD with a Navigation DVD Version 5.

Warranty

Claim Type:	Use applicable claim type. If vehicle is outside any warranty, this Technical Service Bulletin is informational only.		
Service Number:	9153		
Damage Code:	0039		
Labor Operations:	Each MMI Zug update without telephone transceiver R36	9144 25 99	100 TU
	Each MMI Zug update with telephone transceiver R36	9144 26 99	150 TU
Diagnostic Time:	GFF	No allowance	0 TU
	Road test prior to service procedure	No allowance	0 TU
	Road test after service procedure	No allowance	0 TU
	Technical diagnosis at dealer's discretion (Refer to Section 2.2.1.2 and Audi Warranty Online for DADP allowance details)		
Claim Comment:	As per TSB #2014223/3		

All warranty claims submitted for payment must be in accordance with the Audi Warranty Policies and Procedures Manual. Claims are subject to review or audit by Audi Warranty.

## Additional Information

The following Technical Service Bulletin(s) will be necessary to complete this procedure:

- TSB 2019334, 91 MMI High System software update (Zug 864 - update) procedure

All parts and service references provided in this TSB are subject to change and/or removal. Always check with your Parts Department and service manuals for the latest information.

©2009 Audi of America, Inc. All rights reserved. Information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Audi of America, Inc., its affiliated companies and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites, without the prior expressed written permission of the publisher.