



**Audi > Q7 > 2007 - 2008
Electrical Equipment
94 - Removal and Installation**

Bumper Tail Lamp and Bulb Carrier

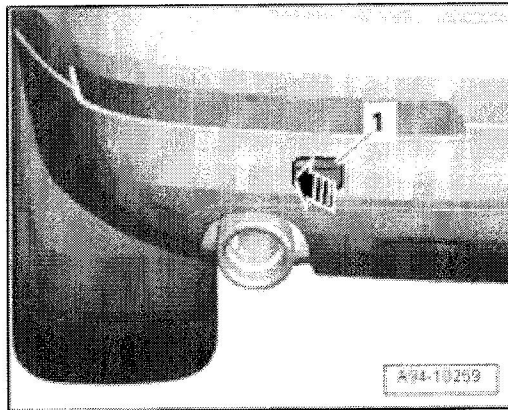


Removing

- Switch off ignition and remove ignition key.
- Turn lamp switch into "0" position.
- Press cover cap - **1** - on outer side - **arrow** - inward.
- Allow cover cap to hang.

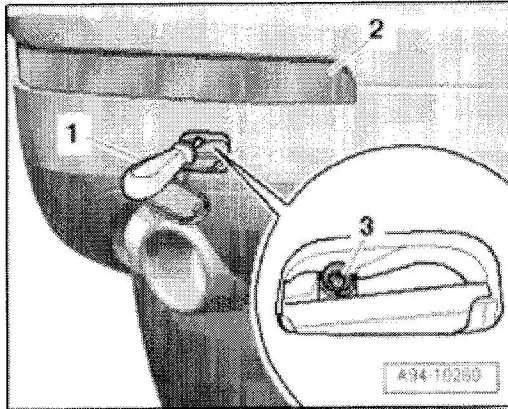

- Remove screw - **3** - with a screwdriver - **1** - .
- Remove rear lamps - **2** - from bumper cover.
- Disconnect electrical connector on central connector.

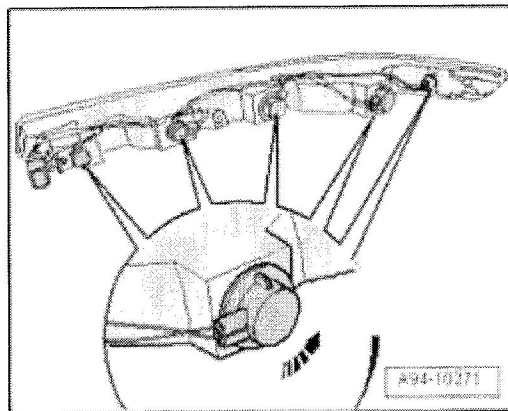

- Turn socket - **arrow** - counterclockwise and remove from rear lamp housing.
- Remove bulb from socket.

Installing

Install in reverse order of removal, observing the following:

- Insert new bulb into socket, do not touch glass cone with bare hands when doing so.
- Secure socket by turning clockwise.
- Tighten screw.
- Press cover cap into bumper cover until it engages audibly.

Tightening torque

Component	Nm
Rear lamps to bumper cover	2.5

Copyright © 2008 Audi of America, Inc. and Bentley Publishers. All rights reserved. Last processed: